




Air Suspension Bearing Co., Ltd

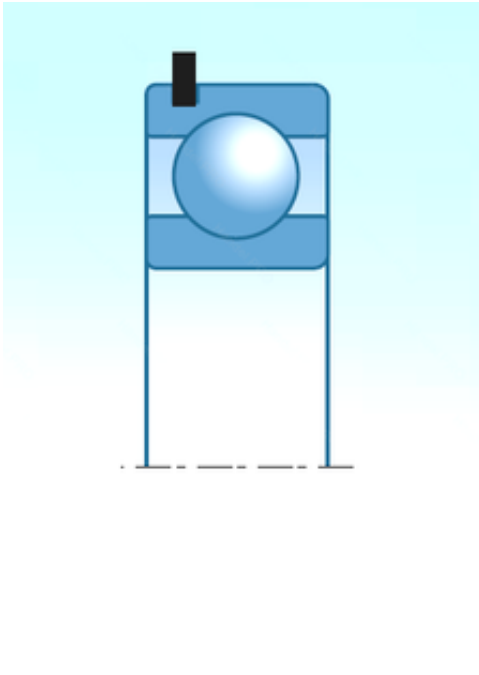

10,000 mm x 30,000 mm x 9,000 mm NTN
6200LLUNR deep groove ball bearings

Bearing No. 6200LLUNR

6200LLUNR Bearing 2D drawings and 3D CAD models

| | |
|---------------------------------|--------------------------|
| Size | 10x30x9 mm |
| Bore Diameter | 10,000 mm |
| Outer Diameter | 30,000 mm |
| Width | 9,000 mm |
| d | 10,000 mm |
| D | 30,000 mm |
| B | 9,000 mm |
| C | 9,000 mm |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | NTN |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 0 |
| EAN | 4547359554670 |
| Product Group | B00308 |
| Enclosure | 2 Seals |
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | Yes |
| Internal Special Features | No |
| Cage Material | Steel |
| Enclosure Type | Contact Seal |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |



Air Suspension Bearing Co., Ltd

| | |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Long Description | 10MM Bore; 30MM Outside Diameter; 9MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; Yes Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage; |
| Other Features | Deep Groove Double Lip Friction Nitrile Rubber Seal With Snap Ring -20 To 120 Deg C Shell Alvania Prelubricated |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.ntnamerica.com |
| Weight / LBS | 0.071 |
| Outside Diameter | 1.181 Inch 30 Millimeter |
| Bore | 0.394 Inch 10 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Outer Race Width | 0.354 Inch 9 Millimeter |
| bore diameter: | 10 mm |
| static load capacity: | 2390 N |
| outside diameter: | 30 mm |
| precision rating: | ISO Class 0 |
| overall width: | 9 mm |
| finish/coating: | Uncoated |
| bore type: | Round |
| bearing material: | High Carbon Chrome Steel |
| closure type: | Double Sealed |
| cage material: | Steel |
| | |



Air Suspension Bearing Co., Ltd

| | |
|------------------------------|----------------------------|
| row type & fill slot: | Single Row Non-Fill Slot |
| inner ring width: | 9 mm |
| snap ring included: | With Snap Ring |
| outer ring width: | 9 mm |
| internal clearance: | CN |
| maximum rpm (grease): | 18000 rpm |
| operating temperature range: | -40 to 120 ° C |
| fillet radius: | 0.6 mm |
| dynamic load capacity: | 5100 N |
| manufacturer product page: | Click here |